

Pad winding specification.

Editable form - enter requirements, save a copy and return to sales@cabletapesuk.com.

Company

Contact name

Email

Phone

Material / product

Grade / construction

Quantity and unit

Customer specification / reference

WINDING DIMENSIONS

Dimensions in mm unless stated. Add tolerances in notes.

Slit width (mm)

Core inside diameter / ID (mm)


Maximum outside diameter / OD (mm)

Tape thickness (mm)

Length per pad / spool (m)

Maximum unit weight (kg)

DIMENSION GUIDE

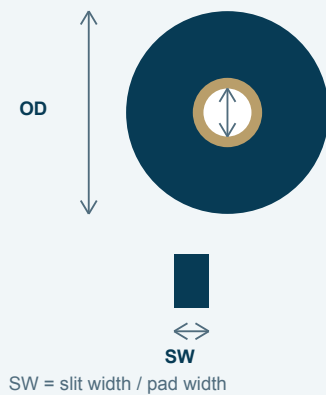

Application, tolerances and other requirements

Material face / colour facing out

Winding direction / payout requirement

Requested dimensions are subject to CTUK technical review and order confirmation.

Spool winding specification.

Editable form - enter requirements, save a copy and return to sales@cabletapesuk.com.

Company

Contact name

Email

Phone

Material / product

Grade / construction

Quantity and unit

Customer specification / reference

WINDING DIMENSIONS

Dimensions in mm unless stated. Add tolerances in notes.

Slit width (mm)

Core inside diameter / ID (mm)

Maximum outside diameter / OD (mm)

Tape thickness (mm)


Length per pad / spool (m)

Maximum unit weight (kg)

Winding width / WW (mm)

Overall core width / CW (mm)

DIMENSION GUIDE

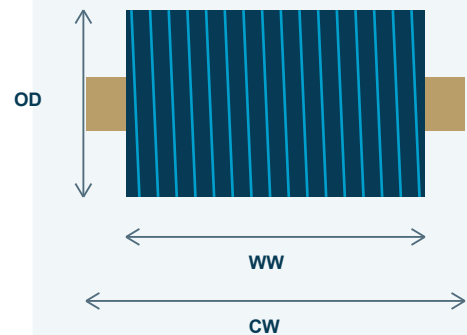

ID = hollow core diameter

Application, tolerances and other requirements

Material face / colour facing out

Winding direction / payout requirement

Requested dimensions are subject to CTUK technical review and order confirmation.